

Answer key

1. (a)	16. (d)	31. (a)	46. (b)	61. (d)
2. (a)	17. (d)	32. (d)	47. (a)	62. (a)
3. (c)	18. (d)	33. (c)	48. (c)	63. (a)
4. (d)	19. (c)	34. (d)	49. (d)	64. (c)
5. (a)	20. (d)	35. (d)	50. (d)	65. (c)
6. (c)	21. (a)	36. (d)	51. (c)	66. (a)
7. (b)	22. (c)	37. (a)	52. (b)	67. (a)
8. (a)	23. (a)	38. (a)	53. (c)	68. (a)
9. (c)	24. (b)	39. (b)	54. (a)	69. (b)
10. (d)	25. (c)	40. (b)	55. (c)	70. (a)
11. (b)	26. (b)	41. (d)	56. (a)	71. (d)
12. (c)	27. (b)	42. (d)	57. (a)	72. (a)
13. (a)	28. (c)	43. (d)	58. (c)	73. (b)
14. (d)	29. (c)	44. (a)	59. (c)	74. (a)
15. (b)	30. (d)	45. (d)	60. (c)	75. (a)



IES MASTER


Institute for Engineers (IES/GATE/PSUs)

Regd. office : F-126, (Upper Basement), Katwaria Sarai, New Delhi-110016 • Phone : 011-41013406

Mob. : 8010009955, 9711853908 • E-mail: ies_master@yahoo.co.in, info@iesmaster.org

SOM CLASS TEST-SOLUTIONS

1. (a)



$$\delta_B(\downarrow) = \frac{w l^4}{8EI}$$

$$\delta_B(\uparrow) = \frac{P l^3}{3EI}$$


$$\delta_B(\downarrow) = \delta_B(\uparrow) \quad (\text{for zero vertical deflection at 'B'})$$

$$\Rightarrow \frac{w l^4}{8EI} = \frac{P \times l^3}{3EI}$$

$$\therefore \frac{800}{8} = \frac{P}{3}$$

$$\therefore P = 300 \text{ KN}$$

2. (a)

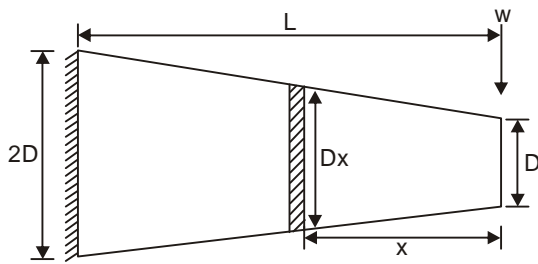

Assuming a cross section at distance x from free end.

$$D_x = D + \frac{2D - D}{L} x = D + \frac{Dx}{L}$$

$$\therefore I_x = \frac{\pi}{64} \left(D + \frac{Dx}{L} \right)^4 = \frac{\pi D^4}{64} \left(1 + \frac{x}{L} \right)^4$$

By unit method

$$\Delta_{\text{free end}} = \int_0^L \frac{M \cdot m \, dx}{EI} = \int_0^L \frac{Wx \times x \, dx}{E \times \frac{\pi D^4}{64} \left(1 + \frac{x}{L} \right)^4} dx$$


$$\text{Let } 1 + \frac{x}{L} = t$$

$$\Rightarrow dx = L \, dt$$

$$x^2 = (t - 1)^2 L^2$$

$$\begin{aligned} \therefore \Delta_{\text{free end}} &= \int_1^2 \frac{W \times 64 (t-1)^2}{\pi E D^4 t^4} dt \times L^3 \\ &= \frac{64 W L^3}{\pi E D^4} \left[\int_1^2 \left(\frac{1}{t^2} + \frac{1}{t^4} - \frac{2}{t^3} \right) dt \right] \\ &= \frac{64 W L^3}{\pi E D^4} \left[-\frac{1}{t} - \frac{1}{3t^3} + \frac{2}{2t^2} \right]_1^2 \\ &= \frac{64 W L^3}{\pi E D^4} \left[-\frac{1}{2} - \frac{1}{24} + \frac{1}{4} + 1 + \frac{1}{3} - 1 \right] = \frac{64 W L^3}{24 \pi E D^4} \end{aligned}$$

$$\therefore \Delta_{\text{free end}} = \frac{64 W L^3}{24 \pi E D^4} \quad \dots (1)$$



$$\Delta_{\text{free end}} = \frac{W L^3 \times 64}{3E \times \pi d^4} \quad \dots (2)$$

For (1) and (2) to be equal


$$\frac{64 W L^3}{24 \pi E D^4} = \frac{W L^3 \times 64}{3E \pi d^4}$$

$$\Rightarrow d^4 = \frac{24}{3} D^4$$

$$\text{or } d = 1.682D$$

3. (c)

4. (d)

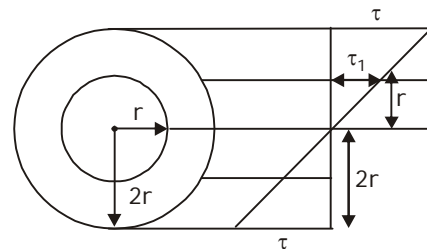


Shear stress in the inner tube

$$\tau_1 = \frac{\tau \times r}{2r}$$

$$\tau_1 = 0.5 \tau$$

5. (a)

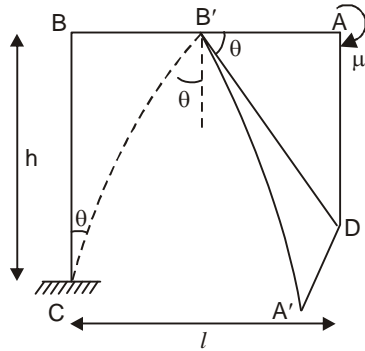


$$\theta = \frac{\mu h}{EI}, AD = \theta \times l = \frac{\mu h l}{EI}$$

$$DA' = \frac{\mu l^2}{2EI}$$

Due to very small deflection, DC' may be taken as vertical deflection

$$\therefore (D_A)_{\text{vertical}} = \frac{\mu l}{EI} + \frac{\mu l^2}{2EI} = \frac{\mu l}{EI} \left[h + \frac{l}{2} \right]$$

6. (c)

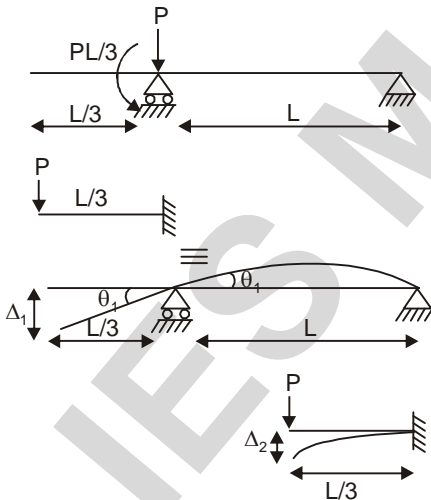


$$\theta_1 = \frac{ML}{3EI} = \frac{PL}{3} \times \frac{L}{3EI}$$

$$\therefore \Delta_1 = \theta_1 \times \frac{L}{3} = \frac{PL}{3} \times \frac{L}{3EI} \times \frac{L}{3} = \frac{PL^3}{27EI}$$

$$\Delta_2 = \frac{P \times \left(\frac{L}{3}\right)^3}{3EI} = \frac{PL^3}{81EI}$$

$$\therefore \Delta_{\text{Total}} = \Delta_1 + \Delta_2 = \frac{PL^3}{27EI} + \frac{PL^3}{81EI} = \frac{4PL^3}{81EI}$$

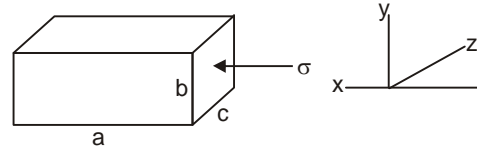

Final length in x, y, z direction is

$$a - \epsilon a, b + \epsilon \mu b \text{ and } c + \epsilon \mu c$$

$$\therefore \text{Final volume} = (a - \epsilon a)(b + \epsilon \mu b)(c + \epsilon \mu c)$$

$$= abc(1 - \epsilon)(1 + \epsilon \mu)(1 + \epsilon \mu)$$


$$= (1 - \epsilon)(1 + \epsilon \mu)^2 V \text{ where } V = abc$$

7. (b)

8. (a)

9. (c)

10. (d)

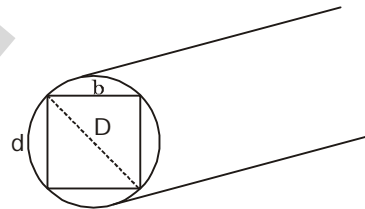

Let rectangular section is $(b \times d)$

$$\text{where } b^2 + d^2 = D^2$$

For the beam to be strongest in the bending, Z should be maximum.

$$Z = \frac{bd^2}{6}$$

$$Z = \frac{b(D^2 - b^2)}{6}$$

For strongest section

$$\frac{dz}{db} = 0 = \frac{1}{6} [D^2 - 3b^2]$$

$$D^2 = 3b^2$$


$$b = \frac{1}{\sqrt{3}} D$$

$$\therefore d^2 = D^2 - \frac{D^2}{3} = \frac{2}{3} D^2$$

$$\Rightarrow d = \sqrt{\frac{2}{3}} D$$

$$\frac{d}{b} = \sqrt{2}$$

11. (b)

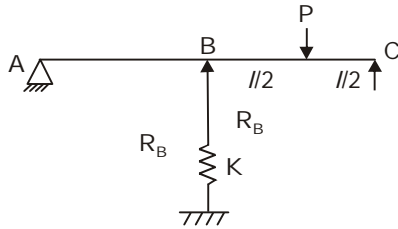


$$R_B + R_C = P$$

$$R_B = R_C = \frac{P}{2}$$

$$\text{Force in spring} = \frac{P}{2}$$

$$\text{Displacement at B} = \frac{P}{2K} \quad (\text{Downward})$$

12. (c)

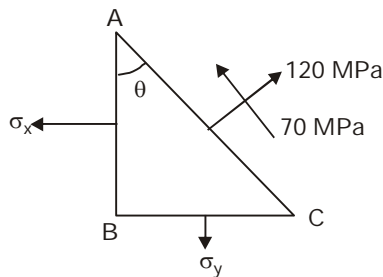

$$120 = \frac{\sigma_x + \sigma_y}{2} + \frac{\sigma_x - \sigma_y}{2} \cos 2\theta$$

$$\Rightarrow 120 = \frac{\sigma_x + \sigma_y}{2} + \frac{\sigma_x - \sigma_y}{2} (2 \cos^2 \theta - 1)$$

$$= \sigma_x (0.5 + 0.5(2 \cos^2 \theta - 1)) + \sigma_y (0.5 - 0.5(2 \cos^2 \theta - 1))$$

$$\cos \theta = \frac{AB}{AC} = \frac{4}{5}$$

$$\Rightarrow 120 = \sigma_x \left(0.5 + 0.5 \left(2 \times \left(\frac{4}{5} \right)^2 - 1 \right) \right) + \sigma_y \left(0.5 - 0.5 \left(2 \times \left(\frac{4}{5} \right)^2 - 1 \right) \right)$$

$$\Rightarrow 120 = \frac{16}{25} \sigma_x + \frac{9}{25} \sigma_y \quad \dots (1)$$

$$\tau_{xy} = 70$$

$$= \frac{-(\sigma_x - \sigma_y)}{2} \sin 2\theta$$

$$= \frac{-(\sigma_x - \sigma_y)}{2} 2 \sin \theta \cos \theta$$

$$= \frac{-(\sigma_x - \sigma_y)}{2} \times 2 \times \frac{3}{5} \times \frac{4}{5} = -(\sigma_x - \sigma_y) \times \frac{12}{25} \dots (2)$$

From (1) and (2)

$$\sigma_x = 67.5 \text{ MPa}$$

$$\sigma_y = 213.33 \text{ MPa}$$

13. (a)

$$T = 16 \text{ kN-M}$$

$$M = 20 \text{ kN-M}$$

as per Tresca theory

$$\tau_{\max} \leq \frac{f_y}{2}$$

$$\frac{16}{\pi d^3} \sqrt{M^2 + T^2} \leq \frac{f_y}{2}$$

$$D^3 = \frac{16 \times 2}{\pi \times f_y} \times \sqrt{M^2 + T^2}$$

$$D = 101.45 \text{ mm}$$

$$D = 102 \text{ mm}$$

14. (d)

$$\frac{t_c}{t_s} = \frac{2 - \mu_c}{1 - \mu_h}$$

$$\frac{t_c}{t_s} = \frac{2 - 0.35}{1 - 0.25}$$

$$\frac{t_c}{t_s} = 2.2$$

15. (b)

$$\sigma_h = \frac{F}{A} - \sigma_l$$

$$\Rightarrow \frac{P_r}{t} = \frac{F}{2\pi r t} - \frac{P_r}{2t}$$

$$\Rightarrow F = 3\pi r^2 p$$

16. (d)

$$\text{Strain energy stored, } v = \frac{LT^2}{2GI_p}$$

$$V_1 = \frac{T^2 \times 2L \times 32}{2G \times \pi D^4}$$

$$V_2 = \frac{T^2 L \times 32}{2 \times G \times \pi \times 16D^4}$$

$$\frac{v_1}{v_2} = 32$$

17. (d)

twist angle at C

$$\theta_c = \frac{T_{AC} \times L_{AC}}{GI_P}$$

$$T_{AC} = \frac{T \times \frac{2L}{3}}{L} = \frac{2T}{3}$$

$$\therefore \theta_c = \frac{\frac{2}{3}T \times \frac{L}{3}}{GI_P}$$

$$\Rightarrow \theta_c = \frac{2TL}{9GI_P}$$


18. (d)

- Effective length of column is the distance between adjacent points of contraflexure or point of zero bending moment.
- Rankine theory of failure is applicable for both short and long column.

$$P_{CR} = \frac{\pi^2 EI}{L^2}$$

for all grade of steel, E is same. So various grades of steel will fail at same buckling load.


19. (c)

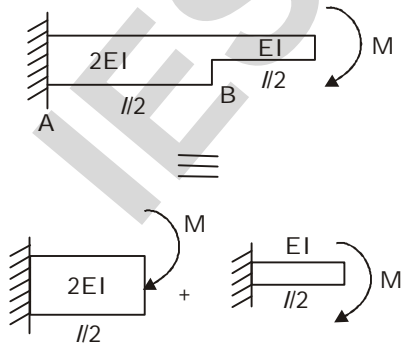

$$\Delta_C = \frac{M \left(\frac{l}{2}\right)^2}{2EI} + \frac{M \left(\frac{l}{2}\right)^2}{2 \times 2EI} + \frac{M \left(\frac{l}{2}\right)^2}{2EI} \times \frac{l}{2}$$

$$= \frac{Ml^2}{8EI} + \frac{Ml^2}{16EI} + \frac{Ml^2}{2 \times 4EI} = \frac{(2+1+2)Ml^2}{16EI} = \frac{5}{16} \frac{Ml^2}{EI}$$

20. (d)

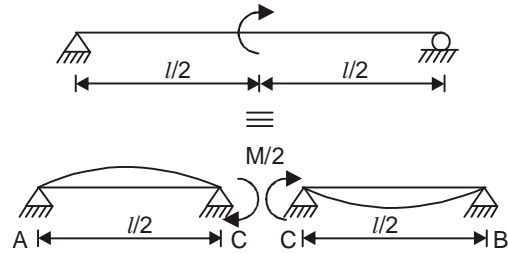


$$\theta_A = \frac{\frac{M}{2} \times \frac{l}{2}}{6EI} = \frac{Ml}{24EI}$$

$$\theta_C = \frac{\frac{M}{2} \times \frac{l}{2}}{3EI} = \frac{Ml}{12EI}$$

$$\theta_B = \frac{\frac{M}{2} \times \frac{l}{2}}{6EI} = \frac{Ml}{24EI}$$

21. (a)

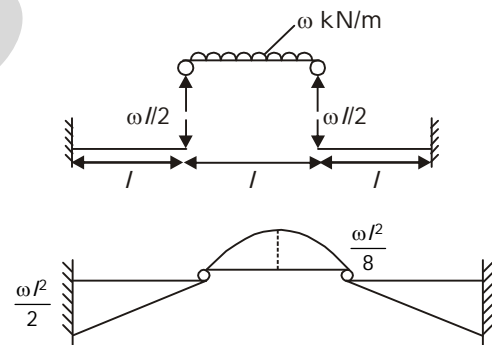


22. (c)

Theory of simple bending is only applicable to sections of beam in which plane of loading is axis of symmetry. Δ and T have symmetry about loading axis (vertical axis) so theory of simple bending is applicable only to these sections.

23. (a)

24. (b)

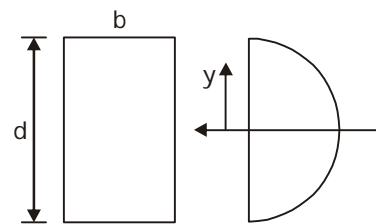

$$\tau = \frac{6V \left(\frac{d^2}{4} - y^2 \right)}{bd^3}$$


$$\tau_{avg} = \frac{V}{bd}$$

$$\tau = \tau_{avg}$$

$$\frac{6V \left(\frac{d^2}{4} - y^2 \right)}{bd^3} = \frac{V}{bd}$$

$$y = \frac{d}{\sqrt{12}} = \frac{d}{2\sqrt{3}}$$

25. (c)

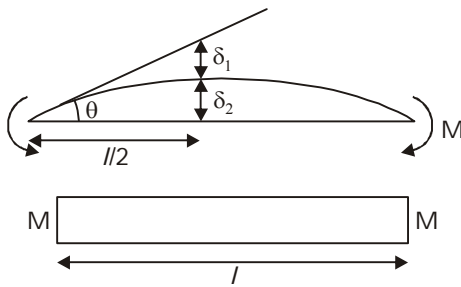

$$\theta = \frac{M/l}{2EI}$$

$$\delta_1 + \delta_2 = \frac{\theta l}{2} = \frac{M/l}{3EI} \times \frac{l}{2} = \frac{Ml^2}{4EI}$$

$$\delta_1 = \frac{Ml}{2EI} \times \frac{l}{4} = \frac{Ml^2}{8EI}$$

$$\delta_2 = \frac{Ml^2}{4EI} - \frac{Ml^2}{8EI} = \frac{Ml^2}{8EI}$$

26. (b)


On the plane of maximum shear stress normal stress

$$\sigma_{n1} = \sigma_{n2} = \frac{\sigma_1 + \sigma_2}{2}$$

$$= \frac{100 + 20}{2}$$

$$= 60 \text{ MPa}$$

27. (b)

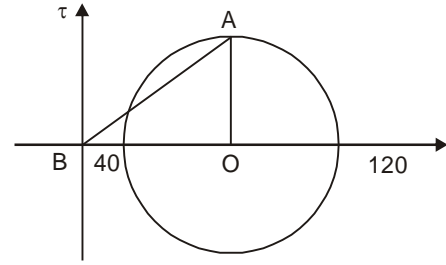

$$\sqrt{OA + OB^2} = \sigma_R$$

$$OA = \frac{120 - 40}{2} = 40 \text{ MPa}$$


$$OB = \frac{120 + 40}{2} = 80 \text{ MPa}$$

$$\begin{aligned} \sigma &= \sqrt{80^2 + 40^2} \\ &= 89.44 \text{ MPa} \\ &\approx 90 \text{ MPa} \end{aligned}$$

28. (c)

- In non circular section apart from shearing stress, torsion also induces warping stress due to unsymmetrical distribution of shear stress.
- In rectangular section, due to torsion maximum shear stress induced is at the midpoint of the longest sides. This shear stress distribution is non liner from the centre.

29. (c)



$$\therefore \frac{\sigma}{y} = \frac{E}{R}$$

$$\Rightarrow \frac{\sigma}{d/2} = \frac{E}{\frac{D}{2} + \frac{d}{2}}$$

$$\Rightarrow \sigma = E \left(\frac{d}{D+2} \right)$$

30. (d)

$$\varepsilon_1 = 80 \times 10^{-6}$$

$$\varepsilon_2 = 20 \times 10^{-6}$$

Maximum shear strain = γ_{\max}

$$\frac{\gamma_{\max}}{2} = \frac{(|\varepsilon_1 - \varepsilon_2|)}{2}$$

$$= 80 \times 10^{-6} - 20 \times 10^{-6}$$

$$\gamma_{\max} = 60 \times 10^{-6}$$

31. (a)

32. (d)

$$\text{shear strain} = \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x}$$

$$= 6 \times 10^{-6} + 6 \times 10^{-6}$$

$$= 12 \times 10^{-6} \text{ unit}$$

33. (c)

$$\frac{\gamma_{yz}}{2} = 0.002$$


$$\gamma_{yz} = 0.004$$

$$\text{Shear stress in } yz \text{ plain} = \gamma_{yz} \times G$$

$$= 0.004 \times 100 \text{ GPa}$$

$$= 400 \text{ MPa}$$

34. (d)



$$\Delta_B = \frac{P\beta}{3EI} + \frac{P\beta^2}{2EI} \times (L-l)$$

$$= \frac{P\beta^2}{EI} \left(\frac{l}{3} + \frac{L-l}{2} \right)$$

$$= \frac{P\beta^2}{2EI} \left(L - \frac{l}{3} \right)$$

35. (d)


36. (d)

In triangular section, maximum shear stress occurs at $h/2$ from vertex.

Therefore statement 1 is wrong.

In circular section, $\tau_{\max} = \frac{4}{3} \tau_{\text{avg}}$

37. (a)

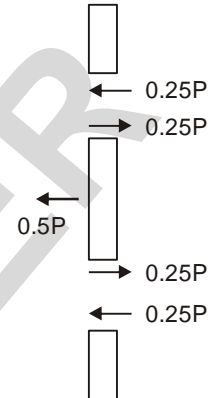


For carried by each pin = $0.5P$

\therefore Shear in each pin = $0.25P$

38. (a)

39. (b)

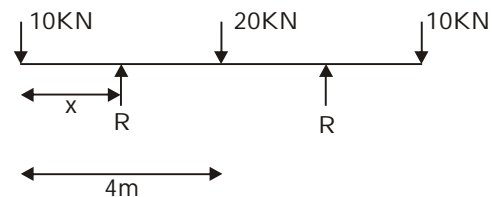

$$R = 20 \text{ kN}$$

Max negative BM = $10 \times x$

Max positive BM = $-40 \times 4 + 20(4-x)$

$$\Rightarrow 10 \times x = -10 \times 4 + 20(4-x)$$


$$\Rightarrow 10x = -40 + 80 - 20x$$

$$\Rightarrow 30x = 40 \Rightarrow x = 1.33 \text{ m}$$

40. (b)

41. (d)

$$Z_c = \frac{\pi}{32} D^3$$




$$Z_s = \frac{D^3}{6}$$

$$\therefore M = \sigma Z$$

$$\text{for same } \sigma, \frac{M_c}{M_s} = \frac{Z_c}{Z_s} = \frac{\frac{\pi}{32} \times D^3}{\frac{D^3}{6}}$$

$$\frac{Z_c}{Z_s} = \frac{3\pi}{16}$$

42. (d)

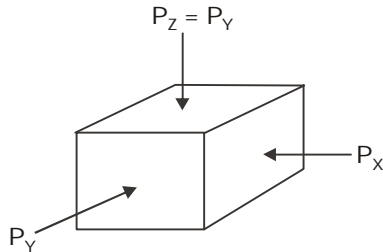

\therefore strain in lateral direction = 0

$$\Rightarrow \frac{P_y}{E} - \frac{\mu P_x}{E} - \frac{\mu P_y}{E} = 0$$

$$\Rightarrow P_y(1 - \mu) = \mu P_x$$

$$\text{or } P_y = \frac{\mu P_x}{1 - \mu}$$

43. (d)

44. (a)

45. (d)

$$F_1 + F_2 = 1000 \text{ Kg}$$

Taking moment about wire 2.

$$F_1 \times 40 = 1000 \times 20$$

$$\Rightarrow F_1 = 500 \text{ Kg}$$

$$F_2 = 500 \text{ Kg}$$

$$\frac{\Delta_1}{\Delta_2} = \frac{F_1}{A_1 E_1} \times \frac{A_2 E_2}{F_2}$$

$$= \frac{2}{4} \times \frac{2}{1} = 1$$

46. (b)

47. (a)



$$\delta_1 = \frac{P_1 L}{AE}, \delta_2 = \frac{P_2 L}{AE}$$

$$\delta = (P_1 + P_2) \frac{l}{AE}$$

$$\text{So, } \delta = \delta_1 + \delta_2$$

48. (c)

49. (d)

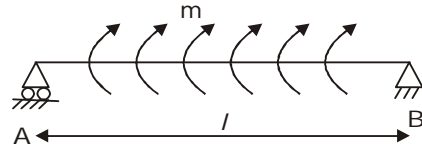

S.F. at any point.

$$(S.F.)_x = R_A = m$$

So S.F.D.



50. (d)

51. (c)

52. (b)

53. (c)


54. (a)

55. (c)

56. (a)


57. (a)

58. (c)



Free expansion of bar (without spring presence)

$$= \alpha t l$$




$$\text{Compression of spring} = \frac{P}{K}$$

$$\therefore \alpha t l - \frac{P}{K} = \frac{Pl}{AE} \Rightarrow P \left(\frac{1}{K} + \frac{l}{AE} \right) = \alpha t l$$

$$\Rightarrow \frac{P}{A} = \frac{\alpha t E}{1 + \frac{AE}{Kl}} = \sigma$$

59. (c)

60. (c)

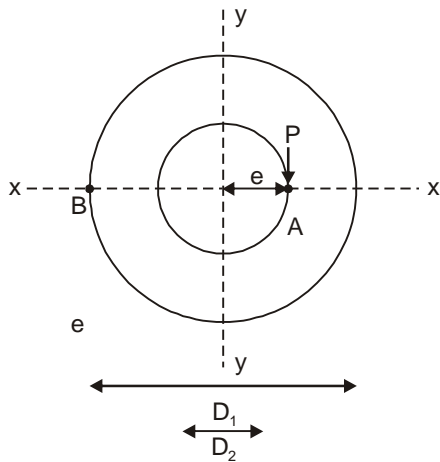

Suppose load P is acting at point 'A' at eccentricity of 'e', then

$$\sigma_B = \frac{P}{A} - \frac{My}{I}$$

$$= \frac{P \times 4}{\pi(D_1^2 - D_2^2)} = \frac{Pe \times \frac{D_1}{2}}{\pi(D_1^4 - D_2^4)} \times 64$$

For no tension at point B,


$$\sigma_B = 0$$

$$\Rightarrow \frac{P \times 4}{\pi(D_1^2 - D_2^2)} = \frac{Pe \times \frac{D_1}{2}}{\pi(D_1^4 - D_2^4)} \times 64$$

$$\Rightarrow e = \frac{D_1^4 - D_2^4}{8D_1(D_1^2 - D_2^2)}$$

$$\Rightarrow e = \frac{D_1^2 + D_2^2}{8D_1}$$

61. (d)

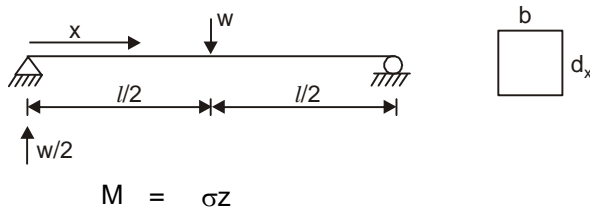

$$M = \sigma z$$

$$\Rightarrow \frac{w}{2} x = \frac{f \times b d_x^2}{6}$$

$$\Rightarrow d_x^2 = \frac{3wx}{fb}$$

$$\text{or } d_x = \sqrt{\frac{3wx}{fb}}$$

62. (a)

$$K = \frac{E}{\sigma_y}$$

$$\alpha \propto \frac{\sigma_y}{\pi^2 E}$$


Rankine constant

$$\alpha = \frac{1}{\pi^2 \frac{E}{\sigma_y}}$$

$$\alpha \propto \frac{1}{K}$$

63. (a)


64. (c)

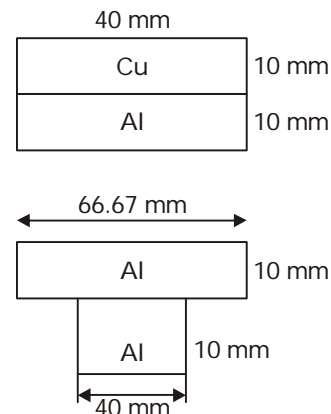

$$\bar{y} \text{ from top} = \frac{(66.67 \times 10 \times 5 + 40 \times 10 \times 15)}{66.67 \times 10 + 40 \times 10}$$

$$= 8.75 \text{ mm}$$

65. (c)

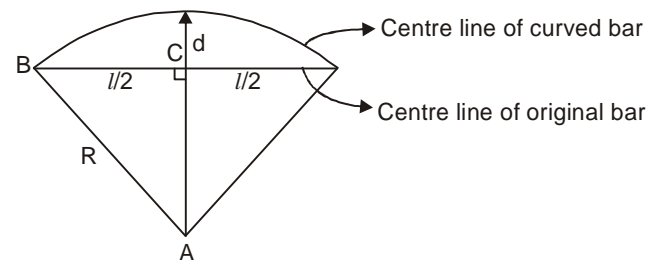

$$R^2 = (R-d)^2 + \frac{l^2}{4}$$

$$\Rightarrow R^2 = R^2 + d^2 - 2Rd + \frac{l^2}{4}$$

$$\text{or } R = l \left(\frac{d}{2l} + \frac{l}{8d} \right)$$

$$\therefore d \ll l$$

$$\therefore R = \frac{l^2}{8d}$$

$$\therefore \frac{\sigma}{E} = \frac{y}{R} \Rightarrow \epsilon = \frac{y}{R}$$

$$\therefore \epsilon = \frac{\frac{t}{2}}{\frac{l^2}{8d}} = \frac{4td}{l^2}$$

66. (a)

67. (a)

68. (a)

$$\epsilon_1 = 8 \times 10^{-4}$$

$$\epsilon_2 = 4 \times 10^{-4}$$

$$\sigma_1 = \frac{E}{1-\mu^2} \times (\epsilon_1 + \mu\epsilon_2)$$

$$\sigma_1 = \frac{75000}{1-0.25} (8 \times 10^{-4} + 2 \times 10^{-4})$$

$$\sigma_1 = \frac{75000 \times 10 \times 10^{-4}}{0.75}$$

$$\sigma_1 = 100 \text{ KPa}$$

69. (b)

70. (a)

Deflection at B

$$6 \times 10^{-3} = \frac{w l^4}{8EI} - \frac{R_B L^3}{3EI}$$

$$6 \times 10^{-3} \times 625000 = \frac{100 \times 5^4}{8} - \frac{R_B \times 5^3}{3}$$

$$6 \times 625 = 125 \left[\frac{100 \times 5}{8} - \frac{R_B}{3} \right]$$

$$30 = \frac{500}{8} - \frac{R_B}{3}$$


$$\frac{R_B}{3} = 32.5$$

$$R_B = 97.5 \text{ kN}$$

$$\therefore R_A = 5 \times 100 - 97.5$$

$$R_A = 402.5 \text{ kN}$$

71. (d)

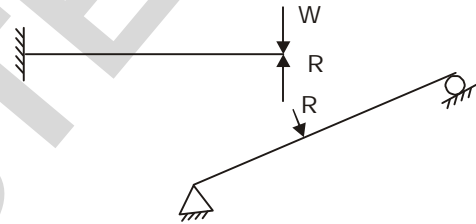

$$\frac{(w-R)l^3}{3EI} = \frac{Rl^3}{48EI}$$

$$16W - 16R = R$$

$$R = \frac{16}{17}W$$

72. (a)

73. (b)

74. (a)

75. (a)